

FLUSH STEEL COMMERCIAL DOORS

16GA(1.5mm),18GA(1.1mm),20GA(0.9mm)
 A40 Galvanized Or Cold-rolled Steel Skins
 Construction is 1-3/4'' (45mm) Thickness

Hinge, closer, lock and strike plate reinforcements
 shall be provided.

Hinge reinforcement: 10GA(3.5mm)
 Closer reinforcement: 12GA(2.5mm)
 Lock reinforcement :16GA(1.5mm)

Strike plate reinforcement: 16GA(1.5mm)

The top, bottom and side closures are fabricated
 from 16GA(1.5mm)thick channel shaped steel sections
 welded to the front and back door skins

Flush top channel :16GA(1.5mm)


Laser welded side seamed edge

Widths up to and including 4' 0"

Heights up to and including 8' 0''

Available with polystyrene core or honeycomb core

DOOR

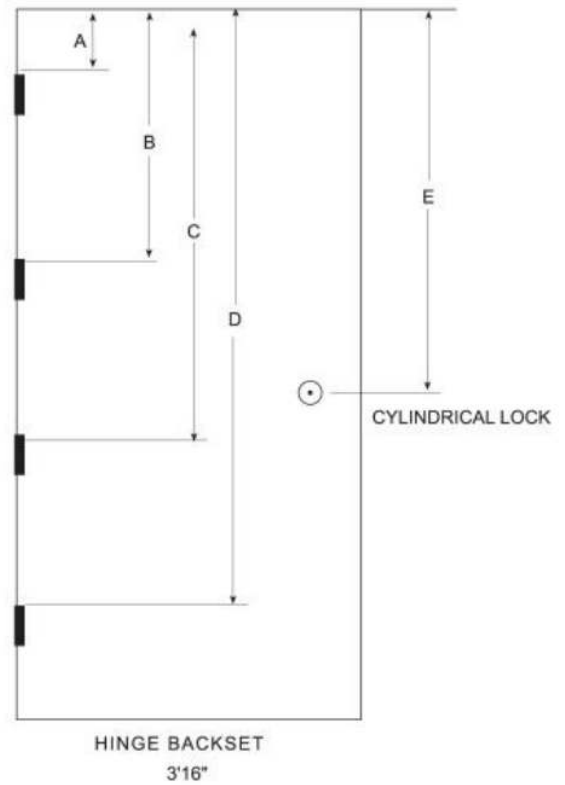

Door other locations are available, we make to request.

Size	A	B	C	D	E
6'8"	7-3/8"	37-5/16"	67-1/4"		39-9/16"
7'0"	7-3/8"	39-5/16"	71-1/4"		43-9/16"
8'0"	7-3/8"	32-43/64"	57-31/32"	83-17/64"	55-9/16"

